



SITI S.p.A. - Società Italiana Trasmissioni Industriali

Via G.Di Vittorio, 4 - 40053 - Valsamoggia Loc. Monteveglio (BO) - ITALY

Tel.+390516714811 - Fax.+390516714858

www.sitiriduttori.it - Email: info@sitiriduttori.it

2023-01-17#948

GEAR UNIT CAD CONFIGURATION



TECHNICAL DATA

TYPE	MBH	RATIO	34,05
SIZE	100	FREQUENCY [Hz]	50Hz
RATIO	34,05	INPUT SPEED [rpm]	1400
PAM	PAM132B5	OUTPUT SPEED [rpm]	41,1
OUTPUT SHAFT	C-D50	INPUT POWER [kW]	5,5
FIXING	STANDARD	OUTPUT TORQUE [Nm]	1175
VERSION	FEET	EFFICIENCY	0,92
MOUNTING POSITION	B3	SERVICE FACTOR	1,36

ACCESSORIES

OPTIONAL

MOUNTED ELECTRIC MOTOR	NO	SENSE OF ROTATION	STANDARD
BACKSTOP DEVICE	NO -	TAPER ROLLER BEARING (OUTPUT SHAFT)	NO
TORQUE ARM	NO	ATEX	NO
TAPER LOCK DEVICES (ONLY CC-A OR CC-B)	NO	LUBRICANT	SUPPLIED WITHOUT LUBRICANT

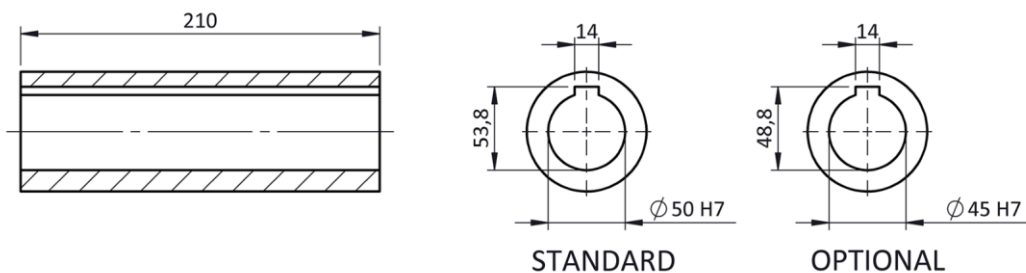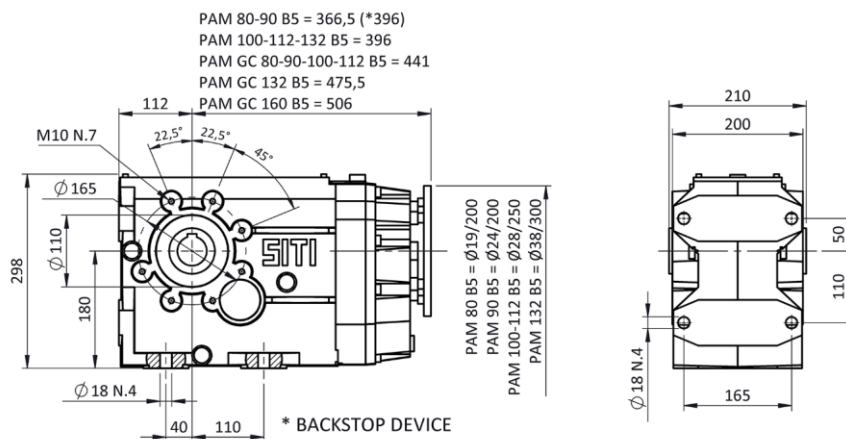

CONFIGURED OUTPUT SHAFT: C-D50



SITI S.p.A. - Società Italiana Trasmissioni Industriali

Via G.Di Vittorio, 4 - 40053 - Valsamoggia Loc. Monteveglio (BO) - ITALY


Tel.+390516714811 - Fax.+390516714858

www.sitiriduttori.it - Email: info@sitiriduttori.it

SENSE OF ROTATION


STANDARD

✓




REMARK: FOR THE VERSION CC-B AND MS-B, THE OUTPUT SENSE OF ROTATION IS OPPOSITE TO THE STANDARD

INVERSE



BACKSTOP DEVICE (UPON REQUEST)


NO



CW OR ACW SENSE PERMITTED


MOUNTING POSITION

B3




✓

B6




✓

B7




✓

B8




✓

V5



✓

V6




✓

AVAILABLE ACCESSORIES (UPON REQUEST)

TORQUE ARM

NO

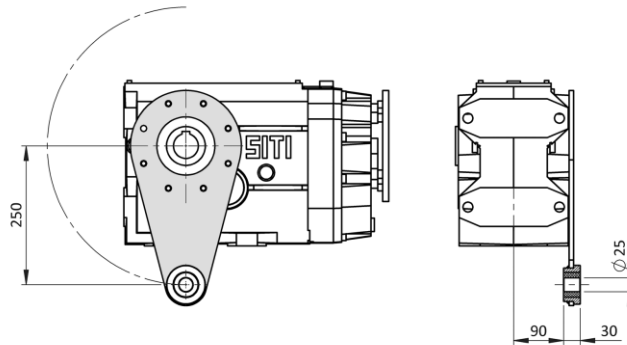

Warning: schematic drawing not in scale - The geometry may not reflect the product accurately